

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/319912334>

# Optimization of the Modified T Vacation Policy for a Discrete-Time $\text{Geom}^{\{X\}}/\text{G}/1$ Queueing System with Startup

Conference Paper in *Advances in Intelligent Systems and Computing* · September 2018

DOI: 10.1007/978-3-319-66514-6\_41

CITATIONS

0

READS

27

4 authors, including:



Caimin Wei

Shantou University

43 PUBLICATIONS 277 CITATIONS

[SEE PROFILE](#)

Some of the authors of this publication are also working on these related projects:



stochastic partial differential equation [View project](#)



retrial queue [View project](#)

Advances in Intelligent Systems and Computing 646

Bing-Yuan Cao *Editor*

# Fuzzy Information and Engineering and Decision

 Springer

# Contents

## Part I: Mathematics and Fuzziness

<b>Bipolar Fuzzy <i>BRK</i>-ideals in <i>BRK</i>-algebras</b> . . . . .	3
Khizar Hayat, Xiao-Chu Liu, and Bing-Yuan Cao	
<b>A New Approach for Solving Fuzzy Supplier Selection Problems Under Volume Discount</b> . . . . .	16
S.H. Nasser and S. Chitgar	
<b>The Lattice of <i>L</i>-fuzzy Filters in a Given <math>R_0</math>-algebra</b> . . . . .	26
Chun-hui Liu	
<b>Intuitionistic Fuzzy Rough Set Based on the Cut Sets of Intuitionistic Fuzzy Set</b> . . . . .	37
Le-tao Wu and Xue-hai Yuan	
<b>Applications and Mathematical Modeling in Operations Research</b> . . . . .	46
Peter Lohmander	
<b>Covering Topology Countability Based on a Subbasis</b> . . . . .	54
Yi-chun Huang, Zhi-wen Mo, and Xian-yong Zhang	
<b>A New Type of Soft Subincline of Incline</b> . . . . .	64
Liu-hong Chen, Zu-hua Liao, Zhen-yu Liao, Yong Li, Xiao-ying Zhu, and Wei Song	
<b>Bidirectional Quantum Teleportation with 5-Qubit States</b> . . . . .	74
Jinwei Wang and Jing Jiang	
<b>Infinitely Small Quantity and Infinitely Large Quantity of Fuzzy Valued Functions for Linear Generation of Structural Elements</b> . . . . .	82
Tian-jun Shu and Zhi-wen Mo	

**Part II: Decision and Fuzziness**

<b>Hesitant Fuzzy Group Decision Making Under Incomplete Information</b> . . . . .	91
Jin-hui Lv and Si-zong Guo	
<b>Signed Total Domination and Mycielski Structure in Graphs</b> . . . . .	102
Arezoo. N. Ghameshlou and Athena Shaminezhad	
<b>An Arbitrated Quantum Signature Scheme Based on W States</b> . . . . .	107
Yu-ting Jiang and Zhi-wen Mo	
<b>Optimal Stochastic Dynamic Control of Spatially Distributed Interdependent Production Units</b> . . . . .	115
Peter Lohmander	
<b>Analysis for the Presence of Quantum Noise on the Teleportation</b> . . . . .	123
Yun-chao Li, Zhi-wen Mo, and Shu-qin Sun	
<b>Design of An Active Control Method for Complete Stabilization of Unknown Fractional-Order Non-autonomous Systems</b> . . . . .	131
Majid Roohi, Hamidreza Hadian, Mohammad Pourmahmood Aghababa, and Seyedeh Maedeh Mirmohseni Amiri	
<b>Three Uncertainty Measures in Neighborhood Systems</b> . . . . .	143
Yan-hong Zhou, Zhi-wen Mo, and Xian-yong Zhang	
<b>An Approach in Solving Data Envelopment Analysis with Stochastic Data</b> . . . . .	154
Amir Hossein Nafei, Seyed Mohammad Esmail Pourmohammad Azizi, and Rajab Ali Ghasempour	
<b>Why Do Young People Hate on the Internet?</b> . . . . .	163
Marta R. Jablonska and Zdzislaw Polkowski	
<b>Part III: Fuzzy Geometric Programming and Optimization</b>	
<b>Properties of Fuzzy Relation Inequalities with Addition-Min Composition</b> . . . . .	177
Bing-Yuan Cao, Xiao-Peng Yang, and Xue-Gang Zhou	
<b>Geometric Programming with Intuitionistic Fuzzy Coefficient</b> . . . . .	186
Ji-hui Yang, Xue-gang Zhou, and Pei-hua Wang	
<b>A New Method for Solving Fully Fuzzy Monomial Geometric Programming with Trapezoidal Fuzzy Parameters</b> . . . . .	196
Armita Khorsandi, Xiao-Chu Liu, and Bing-Yuan Cao	
<b>Note on Max-Łukasiewicz Bipolar Fuzzy Relation Equation</b> . . . . .	210
Xiao-Peng Yang, Khizar Hayat, Pei-hua Wang, and Xue-Gang Zhou	

<b>Multi-level Linear Programming Subject to Max-product Fuzzy Relation Equalities</b> . . . . .	220
Ze-jian Qin, Xiao-cou Liu, and Bingyuan Cao	
<b>Quadratic Programming with Max-product Fuzzy Relation Inequality Constraints</b> . . . . .	227
Xue-Gang Zhou, Xiao-Peng Yang, and Pei-Hua Wang	
<b>A New Algorithm to Shortest Path Problem with Fuzzy Arc Lengths</b> . . . . .	244
Armita Khorsandi, Xiao-Chu Liu, and Bing-Yuan Cao	
<b>Application Research of Improved Classification Recognition Algorithm Based on Causality Analysis</b> . . . . .	250
Yu-bin Zhong, Zi-feng Lyu, and Xiu-ting Kuang	
<b>On Intuitionistic Fuzzy Filters of Filteristic Soft <i>BE</i>-algebras</b> . . . . .	260
Khizar Hayat, Xiao-Chu Liu, and Bing-Yuan Cao	
<b>Part IV: Fuzzy Systems and Operations Research and Management</b>	
<b>Extremal Graphs of Chemical Trees with Minimal Atom-Bond Connectivity Index</b> . . . . .	269
Fu-yi Wei, Zi-yang Xie, Qu-Wei, Guo-bin Zhang, Wei-peng Ye, and Yan-li Zhu	
<b>A Soft Approach to Evaluate the Customer Satisfaction in E-retailing</b> . . . . .	282
Chuan Yue and Zhongliang Yue	
<b>An M/G/1 Queue with Second Optional Service and General Randomized Vacation Policy</b> . . . . .	297
Yan Chen, Xian-Wei Lin, Cai-Min Wei, and Zhun Fan	
<b>The Matrix Representation of Fuzzy Error Logic Conjunction and Applied Research</b> . . . . .	308
Guo Qiwei, Zeng Liting, and Du Juan	
<b>Variational Iteration Method for Solving an Inverse Parabolic Problem</b> . . . . .	321
De-jian Huang and Yan-qing Li	
<b>Using Coloring Function to Partition Vertices in a Fuzzy Graph</b> . . . . .	328
Yan-cai Zhao, Xiao-xuan Liu, and Zu-hua Liao	
<b>A New Approach in Geometric Brownian Motion Model</b> . . . . .	336
Seyed Mohammad Esmail Pour Mohammad Azizi and Abdolsadeh Neisy	
<b>A Study on Comprehensive Traffic Capacity of Urban Roads</b> . . . . .	343
Duan Yuan, Zhang Geng, and Yi-cen Mao	

<b>Solving First Order Fuzzy Initial Value Problem by Fourth Order Runge-Kutta Method Based on Different Means . . . . .</b>	<b>356</b>
Maryam Asghari Hemmat Abadi and Bing Yuan Cao	
<b>Part V: Others</b>	
<b>Non-traveling Wave Exact Solutions of (3+1)-Dimensional Yu-Toda-Sasa-Fukuyama Equation . . . . .</b>	<b>373</b>
Najva Aminakbari, Guo-qiang Dang, Yong-yi Gu, and Wen-jun Yuan	
<b>Research of Solvability and Application of Fuzzy Errors Set Matrix 1 Equation of Type II . . . . .</b>	<b>385</b>
Guo Qiwei and Xiaobing Zhang	
<b>The Relation Between Mathematical Constant and Stock Market Crash . . . . .</b>	<b>396</b>
Qing-can Xiao and Xiao-wen Zhou	
<b>The Impact of Online Information to the Internet Reservations of Hotels in Guangzhou . . . . .</b>	<b>404</b>
Li Xiang and Wu Nan	
<b>Optimization of the Modified <math>T</math> Vacation Policy for a Discrete-Time Geom<sup>[X]</sup>/G/1 Queueing System with Startup . . . . .</b>	<b>414</b>
Xian-Wei Lin, Yan Chen, Cai-Min Wei, and Zhun Fan	
<b>Application of Fuzzy Comprehensive Evaluation Model in Mentality Adaptive Research of College Freshmen . . . . .</b>	<b>425</b>
Yu-bin Zhong, Yue-peng Liu, Ming-shuo Xu, Jia-xi Wu, and Long-zhang Lin	
<b>Assessing Holistic Tourism Resources Based on Fuzzy Evaluation Method: A Case Study of Hainan Tourism Island . . . . .</b>	<b>434</b>
Jing Ma, Gen-nian Sun, and Sheng-quan Ma	
<b>Analysis of Flight Delays . . . . .</b>	<b>447</b>
Zhang Geng and Duan Yuan	
<b>Author Index . . . . .</b>	<b>457</b>

# Optimization of the Modified $T$ Vacation Policy for a Discrete-Time Geom<sup>[X]</sup>/G/1 Queueing System with Startup

Xian-Wei Lin<sup>1</sup>, Yan Chen<sup>2</sup>(✉), Cai-Min Wei<sup>1,3</sup>, and Zhun Fan<sup>3</sup>

<sup>1</sup> Department of Mathematics, Shantou University,  
Shantou 515063, People's Republic of China  
15xwlin1@stu.edu.cn, cmwei@stu.cn

<sup>2</sup> Department of Natural Sciences, Shantou Polytechnic,  
Shantou 515078, People's Republic of China  
cylxq331@126.com

<sup>3</sup> Guangdong Provincial Key Laboratory of Digital Signal  
and Image Processing Techniques, Shantou University,  
Shantou 515063, People's Republic of China  
zfan@stu.edu.cn

**Abstract.** In this paper, we discuss a discrete-time Geom<sup>[X]</sup>/G/1 queueing system with modified  $T$  vacation policy and startup time. We derive the generating functions and the mean values for the steady state system size and the waiting time, and also get those of the busy period, the vacation period and the vacation cycle by using embedded Markov chain. Finally, we determine the optimal  $(T^*, J^*)$  to minimize the cost function with fixed cost elements by constructing a cost function.

**Keywords:** Queueing system model · Startup time · Stochastic decomposition · Modified  $T$  vacations policy · Embedded markov chain method

## 1 Introduction

The server leaves for a vacation with fixed length  $T$  slots when the system is empty. After a vacation, the server returns to the system. The server immediately begins to serve if there is at least one customer waiting for service in the system; otherwise, the server takes another vacation and so on until at least one customer waits for service. This vacation policy is called  $T$  vacation policy and was firstly studied by Levy and Yechiali [1] and Heyman [2]. Sen and Gupta [3] analyzed a time dependent M/M/1 queueing with  $T$  policy via a lattice path combinatoric technique. In recent years, some authors began to study the modified  $T$  policy queueing systems. Ke [4] considered modified  $T$  vacation policy M/G/1 with an unreliable server and startup, and obtained the expected number of customers, the expected waiting time and other performances. It followed that Ke [5] studied a batch arrival queueing system under modified  $T$  vacation

policy with startup and closedown, and determined the optimal  $(T^*, J^*)$  by constructing a cost function. In addition, there are many other queueing models concerned  $T$  policy which have been studied in recent years, details of which may be seen [6–15].

In this paper, we consider a discrete time batch arrival queueing with modified  $T$  policy and startup, and derive the generating functions and the mean values for the steady state system size and the waiting time, and also get the generating functions and the expected values of the busy period, the vacation period and the vacation cycle. In addition, by constructing an cost function, we determine the optimal  $(T^*, J^*)$  to minimize the cost function. In fact, the modified  $T$  vacation policy is applied to many fields now. Take manufacturing systems for example, a machine will process a subproduct with fixed  $T$  slots after all ordinary products have been processed. And after finishing a processed subproduct while no ordinary products wait in queue, the machine continues to process another subproduct. This pattern continues cycle until at least one new ordinary product waits in the queue, otherwise it the server has already processed  $J$  subproducts. After that the machine stops to wait for arrival of the new ordinary products.

The remainder of this paper is organized as follows. A full description of the model and an embedded Markov chain are given in the Sect. 2. In Sect. 3, we obtain stochastic decomposition of the queue size and the expected values of waiting time. In Sect. 4, the expected values length of the vacation cycle, the vacation period and the busy period are obtained. We construct a cost function to introduce the optimal policy in Sect. 5. Finally in Sect. 6, we present some numerical results to illustrate the effect of  $\lambda$  on the expected queue size and the waiting time in the system, and obtain the optimal  $(T^*, J^*)$  with fixed cost elements.

## 2 Describing Model and Embedded Markov Chain

In the classical  $\text{Geom}^{[X]}/G/1$  queueing system, we introduce the following vacation strategy: as soon as the system is empty, the server deactivates to take a vacation with fixed length of  $T$ . If no customers are found in the system when a vacation is finished, while the server takes another vacation with the same length  $T$ . This pattern continues cycle until a vacation is finished, the server finds at least one customer waiting in the queue or he will be already taken  $J$  vacations. If no customers are found at the end of the  $J$ -th vacation, the server stops in the system to wait for the arrival of one customer. If there is at least one customer waiting for service in the system when a vacation is finished or the server is idle in the system, he is immediately reactivated. But, the server will be need a startup time before supplying service for the waiting customers. As soon as the startup is finished, the server starts supplying service for the waiting customers until the system becomes empty again.

In the  $\text{Geom}^{[X]}/G/1$  queueing model with  $T$  policy and startup time, we denote by  $\Lambda$  the number of customers who arrive in a single slot. The  $\Lambda$  is

assumed to be an integral multiple, and its probability distribution and probability generating function of  $A$  are given by, respectively,  $\lambda(k) = p(A = k), k = 0, 1, 2, \dots; A(z) = \sum_{k=0}^{\infty} \lambda(k)z^k, |z| \leq 1$ .

In addition, we denote by  $\lambda$  and  $\lambda^{(i)}$  the mean and the  $i$ -th factorial moment of  $A$ , respectively,  $\lambda = E[A], \lambda^{(i)} = E[A(A-1)\cdots(A-i+1)], i = 2, 3, \dots$ .

Let  $X$  be the service time of one customer and the length of the service time be an integral multiple of a slot duration, then its probability distribution and probability generating function are given by, respectively,  $b(l) = p(X = l), l = 1, 2, \dots; B(z) = \sum_{l=1}^{\infty} b(l)z^l, |z| \leq 1$ .

Let  $b$  and  $b^{(i)}$  be the mean and the  $i$ -th moment of the service time distribution, respectively,  $b = E[X]; b^{(i)} = E[X^i], i = 2, 3, \dots$ .

Let  $S$  be the startup time and the length of the startup time be an integral multiple of a slot duration, then its probability distribution and probability generating are given by, respectively,  $s(l) = p(S = l), l = 1, 2, \dots; S(z) = \sum_{l=1}^{\infty} s(l)z^l, |z| \leq 1$ .

Let  $s$  and  $s^{(i)}$  be the mean and the  $i$ th factorial moment of the startup time distribution, respectively:  $s = E[S]; s^{(i)} = E[S(S-1)\cdots(S-i+1)], i = 2, 3, \dots$ .

Now we consider a Markov chain  $\{L_n; n = 1, 2, \dots\}$ , where  $L_n$  denotes the number of customers present in the system after the server has completed service for the  $n$ -th customer. And suppose that  $A_n$  is the number of arriving customers during the  $n$ -th customer's service and  $\alpha$  is that of present customers in the system at the end of the startup time, thus we have

$$L_{n+1} = \begin{cases} L_n + A_{n+1} - 1, & L_n \geq 1, \\ \alpha + A_{n+1} - 1, & L_n = 0 \end{cases}$$

Let  $A(z)$  be the PGF for  $A_n$ , and  $\alpha(z)$  for  $\alpha$ . For the system, we imagine a  $\text{Geom}^{[X]}/G/1$  queueing system with a vacation period that may terminate in one of the following two situations.

**Case 1.** If there is at least one customer waiting in the system at the end of the  $j$ -th vacation ( $1 \leq j \leq J$ ), the server immediately operates a startup. In this case, at the end of the startup time the PGF for the number of customers waiting in the system is given by  $[1 - \lambda^{JT}(0)][A^T(z) - \lambda^T(0)][1 - \lambda^T(0)]^{-1}S[A(z)]$ .

**Case 2.** If there is no customer waiting in the system at the end of the  $J$ -th vacation, the server stays idle in the system. Once a customer arrives, the server immediately operates a startup. Thus, in this case, at the end of the startup time the PGF for the number of customers found of in the system is given by  $\lambda^{JT}(0)[A(z) - \lambda(0)][1 - \lambda(0)]^{-1}S[A(z)]$ .

From the two cases above, at the end of the startup time the PGF  $\alpha(z)$  for the number of customers waiting in the system is given by

$$\alpha(z) = [1 - \lambda^{JT}(0)] \frac{A^T(z) - \lambda^T(0)}{1 - \lambda^T(0)} S[A(z)] + \lambda^{JT}(0) \frac{A(z) - \lambda(0)}{1 - \lambda(0)} S[A(z)] \quad (1)$$

If we denote by  $\{k_j, j = 0, 1, 2, \dots\}$  and  $\{b_j, j = 0, 1, 2, \dots\}$  the probability distributions for  $A_n$  and  $\alpha + A_n - 1$ , respectively, then the PGFs for them are given by  $A(z) = \sum_{j=0}^{\infty} k_j z^j = B[A(z)], \xi(z) = \sum_{j=0}^{\infty} b_j z^j = \frac{\alpha(z)B[A(z)]}{z}$ .

Therefore, the transition probability matrix of Markov chain  $\{L_n, n = 1, 2, \dots\}$  is given by

$$\tilde{P} = \begin{bmatrix} b_0 & b_1 & b_2 & b_3 & \cdots \\ k_0 & k_1 & k_2 & k_3 & \cdots \\ & k_0 & k_1 & k_2 & \cdots \\ & & k_0 & k_1 & \cdots \\ & & & \vdots & \ddots \end{bmatrix}.$$

By the Foster rule, we can prove that the Markov chain  $\{L_n, n = 1, 2, \dots\}$  is positive recurrence if and only if  $\rho = \lambda b < 1$ .

### 3 Stochastic Decomposition of Queue Size and Expected Waiting Times in System

In the section, we will obtain the PGFs for the steady-state system size and the waiting time.

**Theorem 1.** *If  $\rho < 1$ , the steady-state system size  $L$  can be decomposed into the sum of two stochastic independent variables, i.e.,  $L = L_{Geom[X]/G/1} + L_d$ , where  $L_{Geom[X]/G/1}$  denotes the steady-state system size of classical  $Geom[X]/G/1$  model which generating function and expected value have been given in [15]. Then*

$$L_d(z) = \frac{\lambda[1 - \alpha(z)]}{E[\alpha][1 - \Lambda(z)]}$$

is the generating function of additional system  $L_d$ .

**Proof.** We assume that a steady-state distribution exists for the Markov chain  $\{L_n; n = 1, 2, \dots\}$  and that it is denoted by  $\pi_k = \lim_{n \rightarrow \infty} p(L_n = k), k = 0, 1, 2, \dots$ .

Because the steady-state  $\{\pi_k, k \geq 0\}$  satisfies  $\Pi \tilde{P} = \Pi$ , we have

$$\pi_j = \pi_0 b_j + \sum_{i=1}^{j+1} \pi_i k_{j+1-i}, \quad j \geq 0$$

where  $\Pi = (\pi_0, \pi_1, \pi_2, \dots)$ .

Taking generating function, we obtain

$$\begin{aligned} L(z) &= \sum_{j=0}^{\infty} \pi_j z^j = \pi_0 \sum_{j=0}^{\infty} b_j z^j + \sum_{j=0}^{\infty} \sum_{i=1}^{j+1} \pi_i k_{j+1-i} z^j \\ &= \pi_0 \frac{\alpha(z)B[\Lambda(z)]}{z} + \frac{1}{z} B[\Lambda(z)][L(z) - \pi_0] \end{aligned} \tag{2}$$

Substituting Eq.(1) into Eq.(2), we get

$$L(z) = \frac{\pi_0 B[\Lambda(z)][\alpha(z) - 1]}{z - B[\Lambda(z)]}$$

By the normalization  $L(1) = 1$  and the L'Hospital rule, we obtain

$$\pi_0 = \frac{1 - \rho}{E[\alpha]}$$

where

$$E[\alpha] = [1 - \lambda^{JT}(0)] \frac{T\lambda + s\lambda[1 - \lambda^T(0)]}{1 - \lambda^T(0)} + \lambda^{JT}(0) \frac{\lambda + s\lambda[1 - \lambda(0)]}{1 - \lambda(0)}$$

is the mean number customers at the end of the startup time.

Substituting  $\pi_0$  into Eq.(2), we obtain

$$L(z) = \frac{(1 - \rho)B[A(z)][\alpha(z) - 1]}{E[\alpha]\{z - B[A(z)]\}} = L_{Geom^{[X]}/G/1} \cdot \frac{\lambda[1 - \alpha(z)]}{E[\alpha][1 - A(z)]} \quad (3)$$

Thus, it yields

$$L_d(z) = \frac{\lambda[1 - \alpha(z)]}{E[\alpha][1 - A(z)]}$$

The proof is complete.

In addition, from the Theorem 1, we obtain the mean queue size in system given by

$$E[L] = E[L_{Geom^{[X]}/G/1}] + E[L_d] = E[L_{Geom^{[X]}/G/1}] + \frac{2\lambda E[\alpha(\alpha - 1)] - \lambda^{(2)} E[\alpha]}{2\lambda E[\alpha]}$$

where

$$E[\alpha(\alpha - 1)] = \frac{1 - \lambda^{JT}(0)}{1 - \lambda^T(0)} \{T(T - 1)\lambda^2 + T\lambda^{(2)} + 2Ts\lambda^2 + [1 - \lambda^T(0)](\lambda^2 s^{(2)} + \lambda^{(2)} s)\} + \frac{\lambda^{JT}(0)}{1 - \lambda(0)} \{2\lambda^2 s + \lambda^{(2)} + [1 - \lambda(0)](\lambda^2 s^{(2)} + \lambda^{(2)} s)\}$$

**Theorem 2.** *If  $\rho < 1$ , the steady-state waiting time  $W$  can be decomposed into the sum of two stochastic independent variables, i.e.,  $W = W_{Geom^{[X]}/G/1} + W_d$ , where  $W_{Geom^{[X]}/G/1}$  denotes the steady-state waiting time of classical  $Geom^{[X]}/G/1$  model which generating function and expected value have been given in [15]. Then*

$$W_d(z) = \frac{[1 - \lambda(0)][1 - \beta(z)]}{E(\alpha)(1 - z)}$$

is the generating function of additional system  $W_d$ .

**Proof.** We consider the waiting time of an arbitrary customer in FCFS systems and give explicit expressions for the PGF  $W(z)$  of the waiting time for FCFS systems. The distribution of the waiting time can be easily obtained by assuming that a group of customers arrive in the same slot and they constitute one super-customer in a  $Geom/G/1$  system. That is, the PGF  $A_g(z)$  and the mean  $\lambda_g$  for the number of the super-customers who arrive in a slot in the  $Geom/G/1$  system are given by, respectively,

$$A_g(z) = \lambda(0) + [1 - \lambda(0)]z \quad (4)$$

$$\lambda_g = 1 - \lambda(0) \quad (5)$$

The PGF  $B_g(z)$  for the service time of a super-customer is given by

$$B_g(z) = \tilde{A}[B(z)] = \frac{A[B(z)] - \lambda(0)}{1 - \lambda(0)} \tag{6}$$

Therefore, the PGF for the number of present super-customer in the corresponding  $\text{Geo}^{[X]}/G/1$  system at the end of super-customer's service is given by

$$L_g(z) = \frac{(1 - \rho)B_g[A_g(z)][\alpha_g(z) - 1]}{E[\alpha]\{z - B_g[A_g(z)]\}} \tag{7}$$

where

$$\alpha_g(z) = [1 - \lambda^{JT}(0)] \frac{A_g^T(z) - \lambda^T(0)}{1 - \lambda^T(0)} S[A_g(z)] + \lambda^{JT}(0) \frac{A_g(z) - \lambda(0)}{1 - \lambda(0)} S[A_g(z)]$$

Let  $\beta[A_g(z)] = \alpha_g(z)$ , then we obtain

$$\beta(z) = [1 - \lambda^{JT}(0)] \frac{z^T - \lambda^T(0)}{1 - \lambda^T(0)} S(z) + \lambda^{JT}(0) \frac{z - \lambda(0)}{1 - \lambda(0)} S(z)$$

Since the number of present super-customer in the system at the end of super-customer's service equals just that arriving super-customer in the time interval that they have been in the system, by  $W_g(z)$  denoting the PGF for the waiting time of the super-customer, we have the following expression

$$L_g(z) = W_g[A_g(z)]B[A_g(z)] \tag{8}$$

Note that the traffic intensity  $\rho$  is the same in classic  $\text{Geom}/G/1$  and  $\text{Geom}^{[X]}/G/1$  queue systems. Substituting Eqs.(4)–(7) into Eq.(8), we get the PGF  $W_g(z)$  for the waiting time  $W_g$  of a supercustomer in an FCFS system as

$$W_g(z) = \frac{(1 - \rho)[1 - \lambda(0)][1 - \beta(z)]}{E[\alpha]\{A[B(z)] - z\}} \tag{9}$$

The waiting time  $W$  of an arbitrary customer consists of two independent components. One is the waiting time  $W_g$  of a super-customer to who the arbitrary customer belongs; the other, denoted by  $J$ , is the sum of the service time for those customers within the same super-customer who are served in front of the arbitrary customer. Note that these components are independent. If  $J(z)$  denotes the PGF for  $J$ , we have

$$W(z) = W_g(z)J(z) \tag{10}$$

In order to get the  $J(u)$ , we know that the number of customers within the super-customer that are served in front of the arbitrary customer is equivalent to the forward recurrence time in a discrete-time renewal process when the inter-renewal time is given by the number of customers included in the super-customer. Hence we have

$$J(z) = \frac{1 - A[B(z)]}{\lambda[1 - B(z)]} \tag{11}$$

Substituting Eqs. (9) and (11) into Eq.(10), we get

$$W(z) = \frac{(1-\rho)[1-\lambda(0)][1-\beta(z)]\{1-A[B(z)]\}}{\lambda E[\alpha][1-B(z)]\{A[B(z)]-z\}} = W_{Geo^{[x]}/G/1}(z)W_d(z)$$

Thus, it yields

$$W_d(z) = \frac{[1-\lambda(0)][1-\beta(z)]}{E(\alpha)(1-z)}$$

The proof is complete.

In addition, from the Theorem 2, we obtain the mean waiting time in system given by

$$E[W] = E[W_{Geo^{[x]}/G/1}] + E[W_d] = E[W_{Geo^{[x]}/G/1}] + \frac{E[\beta(\beta-1)][1-\lambda(0)]}{2E(\alpha)}$$

where

$$E[\beta(\beta-1)] = \frac{1-\lambda^{JT}(0)}{1-\lambda^T(0)}\{T(T-1)+2Ts+[1-\lambda^T(0)]s^{(2)}\} + \frac{\lambda^{JT(0)}}{1-\lambda(0)}\{2s+[1-\lambda(0)]s^{(2)}\}$$

#### 4 Expected Length of the Vacation Cycle, the Vacation Period and the Busy Period

We define a time interval as a vacation period that starts at the busy period and terminates at the beginning of the startup time, and denote it by  $I_v$ . It consists of a vacation and an idle period. Then we can obtain the probabilities and the PGF, respectively,

$$\begin{cases} P(I_v = kT) = [1-\lambda(0)]\lambda^{(k-1)T}(0)\sum_{j=0}^{T-1}\lambda^j(0), & 1 \leq k \leq J, \\ P(I_v = JT+i) = \lambda^{JT+i-1}(0)[1-\lambda(0)], & i \geq 1 \end{cases}$$

and

$$\begin{aligned} I_v(z) &= \sum_{j=1}^{\infty} P(I_v = j)z^j \\ &= [1-\lambda(0)]\left\{\sum_{k=1}^J \lambda^{(k-1)T}(0)\sum_{j=0}^{T-1}\lambda^j(0)z^{kT} + \sum_{i=1}^{\infty} \lambda^{JT+i-1}(0)z^{JT+i}\right\} \\ &= \frac{[1-\lambda(0)][1-\lambda^{JT}(0)]z^{JT}}{1-\lambda^T(0)z^T} + \frac{\lambda^{JT(0)}[1-\lambda(0)]z^{JT+1}}{1-\lambda(0)z} \end{aligned}$$

Thus, it leads to the mean vacation period length

$$E(I_v) = \frac{-JT\lambda^{JT}(0)[1-\lambda(0)] + T[1-\lambda^{JT}(0)]}{1-\lambda^T(0)} + \frac{\lambda^{JT(0)}\{(JT+1)[1-\lambda(0)] + \lambda(0)\}}{1-\lambda(0)} \quad (12)$$

We denote by  $\Theta_v$  a busy period defined as a time interval from the end of the startup time to the beginning of the next vacation. Since  $\alpha$  is the number of

customers in the system at the beginning of a busy period, the PGF  $\Theta_v(z)$  and the mean  $E(\Theta_v)$  for the length  $\Theta_v$  of a busy period are given by

$$\begin{aligned} \Theta_v(z) &= \alpha[\Theta(z)] \\ &= [1 - \lambda^{JT}(0)] \frac{A^T(\Theta(z)) - \lambda^T(0)}{1 - \lambda^T(0)} S[A(\Theta(z))] + \lambda^{JT}(0) \frac{A(\Theta(z)) - \lambda(0)}{1 - \lambda(0)} S[A(\Theta(z))] \end{aligned}$$

and

$$\begin{aligned} E(\Theta_v) &= \frac{E(\Theta)[1 - \lambda^{JT}(0)]}{1 - \lambda^T(0)} \{\lambda T + s\lambda[1 - \lambda^T(0)]\} + \frac{\lambda E(\Theta)\lambda^{JT}(0)\{1 + s[1 - \lambda(0)]\}}{1 - \lambda(0)} \\ &= \frac{\rho[1 - \lambda^{JT}(0)]}{(1 - \rho)[1 - \lambda^T(0)]} \{T + s[1 - \lambda^T(0)]\} + \frac{\rho\lambda^{JT}(0)\{1 + s[1 - \lambda(0)]\}}{(1 - \rho)[1 - \lambda(0)]} \end{aligned} \quad (13)$$

where  $\Theta$  is the length of a busy period caused by the service time of a single customer in the system,  $\Theta(z)$  and  $E(\Theta)$  are the PGF and the mean of  $\Theta$ , respectively.

A vacation cycle consists of a vacation period, startup time and the follow busy period. The PGF  $C_v(z)$  and the mean  $E[C_v]$  for the length  $C_v$  of the vacation cycle are given by

$$\begin{aligned} C_v(z) &= I_v(z) \cdot S(z) \cdot \Theta_v(z) \\ &= S(z) \times S[A(\Theta(z))] \times \left\{ \frac{[1 - \lambda^T(0)][1 - \lambda^{JT}(0)]z^{JT}}{1 - \lambda^T(0)z^T} + \frac{\lambda^{JT}(0)[1 - \lambda(0)]z^{JT+1}}{1 - \lambda(0)z} \right\} \\ &\quad \times \left\{ [1 - \lambda^{JT}(0)] \frac{A^T(\Theta(z)) - \lambda^T(0)}{1 - \lambda^T(0)} + \lambda^{JT}(0) \frac{A(\Theta(z)) - \lambda(0)}{1 - \lambda(0)} \right\} \end{aligned}$$

and

$$\begin{aligned} E[C_v] &= E(I_v) + s + E(\Theta_v) \\ &= s + \frac{-JT\lambda^{JT}(0)[1 - \lambda^T(0)] + T[1 - \lambda^{JT}(0)]}{1 - \lambda^T(0)} + \frac{\lambda^{JT}(0)\{(JT+1)[1 - \lambda(0)] + \lambda(0)\}}{1 - \lambda(0)} \\ &\quad + \frac{\rho[1 - \lambda^{JT}(0)]}{(1 - \rho)[1 - \lambda^T(0)]} \{T + s[1 - \lambda^T(0)]\} + \frac{\rho\lambda^{JT}(0)\{1 + s[1 - \lambda(0)]\}}{(1 - \rho)[1 - \lambda(0)]} \end{aligned} \quad (14)$$

### 5 Optimal Policy

In this section, we will construct a total long-run average cost function per customer per unit time for the system, in which  $T$  and  $J$  are all decision variables. Our purpose is to determine the optimal  $T$  and  $J$  to minimize this cost function. The following cost elements are considered:  $c_h$  is the holding cost per unit time for each present customer in the system;  $c_s$  is the setup cost for per busy cycle;  $c_i$  is the cost per unit time for keeping the server off;  $c_u$  is the startup cost per unit time for the preparatory work of the server before starting the service.

Employing the definition of each cost element and its corresponding system characteristics, the total long-run average cost per unit time is given by

$$\begin{aligned} F(J, T) &= c_h E[L] + c_s \frac{1}{E[C_v]} + c_i \frac{E[I_v]}{E[C_v]} + c_u \frac{s}{E[C_v]} \\ &= c_h E[L_{Geo[X]/G/1}] + \frac{c_h \{2\lambda E[\alpha(\alpha-1)] - \lambda^2 E[\alpha]\}}{2\lambda E[\alpha]} + \frac{c_s(1-\rho)(1-\lambda(0))[1-\lambda^T(0)]}{A} \\ &\quad + \frac{c_i(1-\rho)(1-\lambda(0))[1-\lambda^T(0)]E[I_v]}{A} + \frac{c_u s(1-\rho)(1-\lambda(0))[1-\lambda^T(0)]}{A} \end{aligned} \quad (15)$$

where

$$E[L_{Geo[x]/G/1}] = \rho + \frac{\lambda^2 b^{(2)} - \lambda\rho + b\lambda^{(2)}}{2(1 - \rho)}$$

$$A = s(1 - \rho)[1 - \lambda(0)][1 - \lambda^T(0)] + (1 - \rho)[1 - \lambda(0)]\{-JT\lambda^{JT}(0)[1 - \lambda^{JT}(0)]\} \\ + T[1 - \lambda^{JT}(0)] + (1 - \rho)\lambda^{JT}(0)[1 - \lambda^T(0)]\{(JT + 1)[1 - \lambda(0)] + \lambda(0)\} \\ + \rho[1 - \lambda(0)][1 - \lambda^{JT}(0)]\{T + s[1 - \lambda^T(0)]\} + \rho\lambda^{JT}(0)[1 - \lambda^{JT}(0)]\{1 + s[1 - \lambda(0)]\}$$

We consider the model with a minimum cost function. For fixed  $c_s, c_h, c_i$  and  $c_u$ , the optimization problem is described as follows:

$$\min F(J, T) = c_h E[L] + c_s \frac{1}{E[C_v]} + c_i \frac{E[I_v]}{E[C_v]} + c_u \frac{s}{E[C_v]}, \quad (16) \\ \text{s.t. } T \geq 1, J \geq 1, T, J \in N^+, \text{ and } (c_h, c_s, c_i, c_u > 0)$$

We denote the solution by  $(J^*, T^*)$  that minimizes the cost function  $F(J, T)$ .

### 6 Numerical Illustration

In the section, the first purpose is to study the effects of some parameters on the expected values of the customers' number and waiting time in the system. We assume that the number of customers  $A$  in a single slot follows a poisson distribution with a parameter  $\lambda$ , and that service time  $X$  of a customer and setup time  $S$  follow geometric distributions with the parameters  $p_1$  and  $p_2$ , respectively.

For convenience, we choose  $T = 1, 10, 20, J = 5, p_1 = 0.8$  and  $p_2 = 0.8$ , vary the value of  $\lambda$  from 0.3 to 0.7.

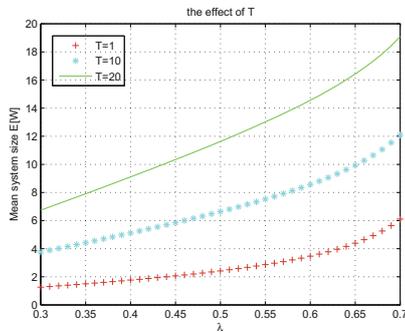


Fig. 1. The expected system size

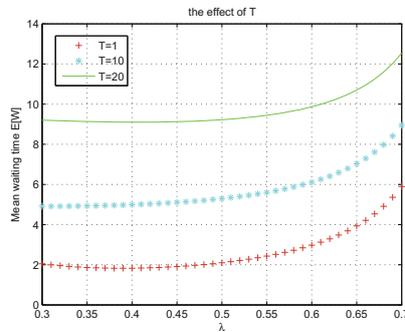
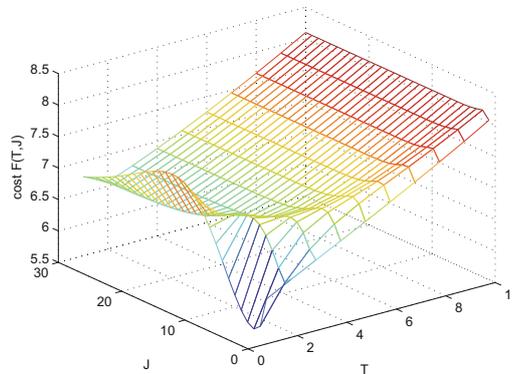


Fig. 2. The expected waiting time

Figures 1 and 2 show that the expected system size and the expected waiting time are all functions of the arrival rate  $\lambda$ . We find that whenever  $\lambda$  increases, the expected system size and the expected waiting time increase at a higher level. Meanwhile, the both increase faster with  $T$  increasing.



**Fig. 3.** Mean waiting time  $E[W_v]$  versus traffic intensity  $\rho$ .

The second purpose is to study the effects of some parameters on the cost function. We assume that the number of customers  $A$  in a single slot follows a poisson distribution with a parameter  $\lambda$ , and that service time  $X$  of a customer and setup time  $S$  follow geometric distributions with parameters  $p_1$  and  $p_2$ , respectively. We choose  $\lambda = 0.15, p_1 = 0.3, p_2 = 0.5, c_h = 2, c_s = 20, c_i = 3$  and  $c_u = 10$ , vary the values of  $T$  and  $J$  from 1 to 10 and 1 to 30, respectively.

Figure 3 shows that the minimum cost value per unit time of 5.5731 is obtained at  $(T^*, J^*) = (1, 3)$ .

## 7 Conclusion

The paper introduces the optimal modified  $T$  vacation policy for the discrete-time  $\text{Geom}^{[X]}/G/1$  queueing with startup. By using the embedded Markov chain method, we obtain the PGFs and the expected values for the steady state system size, waiting time, busy period and vacation cycle. Additionally, By constructing a cost function, we determine the optimal values of  $T$  and  $J$  to minimize the cost function. We will further try to study the  $N$  policy for the  $\text{Geom}^{[X]}/G/1$  queueing system.

**Acknowledgements.** Thanks to the support by National Natural Science Foundation of China (No. 61175073).

**Recommender:** Professor Lv Shengli, School of Science, Yanshan University, Qinhuangdao 066004 P.R. China.

## References

1. Levy, Y., Yechiali, U.: Utilization of idle time in an M/G/1 queue. *Manage. Sci.* **22**, 202–211 (1975)
2. Heyman, D.P.: The  $T$  policy for the M/G/1 queue. *Manage. Sci.* **23**, 775–778 (1977)
3. Sen, K., Gupta, R.: Time dependent analysis of  $T$ -policy M/M/1 queues-A new approach. *Studia Scientiarum Mathematicarum Hungarica* **34**(4), 453–473 (1998)
4. Ke, J.C.: Modified  $T$  vacation policy for an M/G/1 queueing system with an unreliable server and startup. *Mathe. Comput. Model.* **41**, 1267–1277 (2005)
5. Ke, J.C.: Two thresholds of a batch arrival queueing system under modified  $T$  vacation policy with startup and closedown. *Mathe. Methods Appl. Sci.* **31**(2), 229–247 (2008)
6. Tadj, L.: On an M/G/1 quorum queueing system under  $T$  policy. *J. Oper. Res. Soc.* **54**, 446–471 (2003)
7. Kim, D.J., Moon, S.A.: Randomized control of  $T$  policy for an M/G/1 system. *Comput. Ind. Eng.* **51**(4), 684–692 (2006)
8. Wang, K.H., Pearn, W.L.: Maximum entropy analysis to the  $T$  policy M/G/1 queue with server breakdowns and startup times. *Int. J. Inf. Manage. Sci.* **20**(3), 395–414 (2009)
9. Wang, T.Y., Wang, K.H., Pearn, W.L.: Optimization of the  $T$  policy M/G/1 queue with server breakdowns and general startup times. *J. Comput. Appl. Math.* **228**, 270–278 (2009)
10. Luo, C.Y., Tang, Y.H., Chao, B.S., Xiang, K.L.: Performance analysis of a discrete-time Geo/G/1 queue with randomized vacations and at most  $J$  vacations. *Appl. Math. Model.* **37**(9), 6489–6504 (2013)
11. Wu, C.H., Lee, W.C., Ke, J.C., Liu, T.H.: Optimization analysis of an unreliable multi-server queue with a controllable repair policy. *Comput. Oper. Res.* **49**, 83–96 (2014)
12. Wei, C.M., Cai, L., Wang, J.J.: A discrete-time Geom/G/1 retrial queue with balking customers and second optional service. *OPSEARCH* **53**, 344–357 (2016)
13. Zhang, X.L., Wang, J.T., Do, T.V.: Threshold properties of the M/M/1 queue under  $T$ -policy with applications. *Appl. Math. Comput.* **261**, 284–301 (2015)
14. Lim, D.E., Lee, D.H., Yang, W.S., Chae, K.C.: Analysis of the GI/Geo/1 queue with  $N$ -policy. *Appl. Math. Model.* **37**(7), 4643–4652 (2013). Original research article
15. Takagi, H.: Queueing analysis-a foundation of performance evaluation, Discrete time systems, vol. 3, North-holland, Amsterdam (1993)